



PORCH ENCLOSURES

-THE WEATHER-LITE COLLECTION-

Bringing the Outdoors-Indoors

FEATURES & BENEFITS FOR PORCH ENCLOSURES!

*By: Ron Goins
Director of Sales Development*

WEATHER-LITE COLLECTION

FEATURES & BENEFITS

Table of Contents

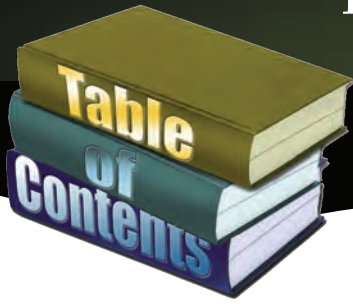


Table of Contents

- Page 1: 4t4v Vertical Vinyl—*Features & Benefits*
- Page 2: Horizontal Vinyl—*Features & Benefits*
- Page 3: Lip Frame—*Features & Benefits*
- Page 4: Horizontal Acrylic—*Features & Benefits*
- Page 5: How To Measure
- Page 6: How To Install 4t4v Vertical Vinyl
- Page 7: How To Install Horizontal Vinyl & Horizontal Acrylic
- Page 8: Troubleshooting

WEATHER-LITE COLLECTION



4t4v VERTICAL VINYL *Features & Benefits*



4t4v Vertical Vinyl

- Slide all vents to bottom, or...
- Slide all vents to top for up to 70% ventilation
- Close vents for no ventilation
- Frame Colors: White-Bronze-Driftwood= OSM
- OSM= Outside Mount
- OSM available with factory rolled screen
- Vinyl Colors: Clear-Purple-Bronze-Smoke Gray




- Max Size 4t4v Vertical= 72" x 84"
- Max Size 4t8v Stereo= 120" x 84"
- Max Size 4t12v Stereo= 144" x 84"
- 10 year warranty on cracking vinyl
(do not use ammonia or chlorine based cleaning solutions)
- Light weight for easy operation and removal



WEATHER-LITE COLLECTION

HORIZONTAL VINYL *Features & Benefits*

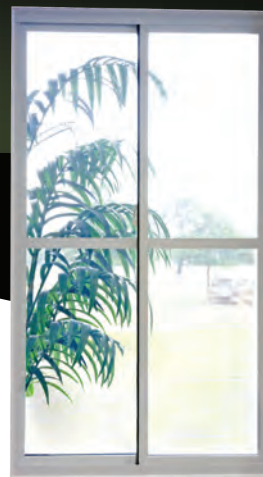

Horizontal Vinyl

- Slide panels to either side for up to 50% ventilation
- Remove panels for 100% ventilation
- Light weight for easy operation and removal
- Vertical Latch
- Frame Colors: White-Bronze-Driftwood= OSM
- Vinyl Colors: Clear-Purple-Bronze-Smoke Gray



- OSM available with factory rolled in screen
- Max Size: 2t2v= 108" x 108"
- 10 year warranty on cracking vinyl
(do not use ammonia or chlorine based cleaning solutions)




WEATHER-LITE COLLECTION

Lip Frame

Features & Benefits



Lip Frame

- Fixed panel for small openings above or beside door or for transom
- Frame Colors: White-Bronze-Driftwood 
- Vinyl Colors: Clear-Purple-Bronze-Smoke Gray



- Max Size: 72" x 24" or see your factory rep. for more details
- 10 year warranty on cracking vinyl
(do not use ammonia or chlorine based cleaning solutions)




WEATHER-LITE COLLECTION

HORIZONTAL ACRYLIC *Features & Benefits*



#5200 Horizontal Acrylic

- Slide panels to either side for up to 50% ventilation
- Remove panels for 100% ventilation
- Light weight for easy operation and removal
- Push button handles »
- Available outside mount or inside mount
- Available with removable screens (OSM only)
- 2p2t—maximum size: 78” x 96” (over 76” tall requires spreader bar)
- Also available as multi-vent 4p2t up to 16’ wide—center lock
- Frame Colors: White-Bronze »
- Acrylic Colors: Clear-Bronze-Gray

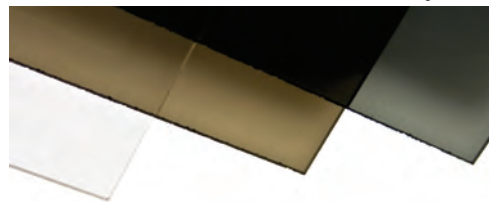

- Clean with soft cloth and lukewarm mild detergent or acrylic cleaner
(do not use ammonia or chlorine based cleaning solutions)



WEATHER-LITE COLLECTION

How To Measure



How To Measure

All measurements should be measured by DLO,
(daylight opening), width x height.

- Measure width at 3 places, bottom-middle-top and take smallest measurement (see Figure 1)
- Measure height at 3 places, left side-middle-right side, and take smallest measurement (see Figure 2)
- Deduct 1/8" from DLO width and height for correct fit
(A 1/8" deduction is a must)

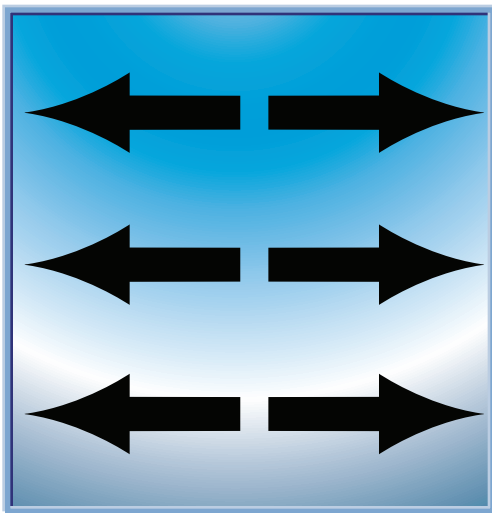


Figure 1

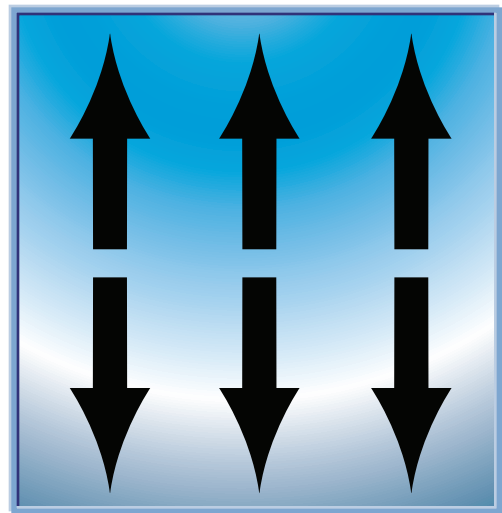


Figure 2

WEATHER-LITE COLLECTION

How To Install 4t4v VERTICAL VINYL ???

How To Install 4t4v Vertical Vinyl

All porch windows have a 1" flange and are designed to fasten through flange into post/structure (Use appropriate screws for wood or aluminum)

- Step 1: Check for correct fit, window 1 for opening 1, window 2 for opening 2 and etc.
- Step 2: Apply a bead of caulk on to back side of flange and square into opening
- Step 3: Fasten first screw into bottom left corner
- Step 4: Fasten next screw into top left corner
- Step 5: Fasten next screw into top right corner
- Step 6: Fasten next screw into bottom right corner
- Step 7: Depending on height, fasten at least 2 more screws on left and right sides between top and bottom screws
- Step 8: Fasten screw in middle of header and sill
- Step 9: Operate vents up and down for easy operation

Congratulations! You are finished. Repeat for next window.

WEATHER-LITE COLLECTION

How To Install Horizontal Vinyl **???** & Horizontal Acrylic

How To Install Horizontal Vinyl & Horizontal Acrylic

- Step 1: Check for correct fit, window 1 for opening 1, window 2 for opening 2 and etc.
- Step 2: Apply a bead of caulk on to back side of flange and square into opening
- Step 3: Fasten first screw into bottom left corner
- Step 4: Fasten next screw into top left corner
- Step 5: Fasten next screw into top right corner
- Step 6: Fasten next screw into bottom right corner
- Step 7: Depending on height, fasten at least 2 more screws on left and right sides between top and bottom screws
- Step 8: Fasten screw in middle of top header
- Step 9: Fasten screw in middle of bottom sill
- Step 10: Slide panels for easy operation

Congratulations! You are finished. Repeat for next window.

WEATHER-LITE COLLECTION



Troubleshooting

Problem

- Vents won't stay up into header
- Vents too tight in header
- Vents too tight in outer frame, not sliding easy

Correction

- Check gap at header, and adjust if necessary—Inherent characteristic drops slightly on Spring side of vent
- Adjust gap of header
- Check for hour glassing of outer main frame—Check to see if screen rolled too tight—Spray small amount of silicone on track